

PCLC

Medium voltage, compression copper Lug for separable connector

Application


For Tee type separable connector, connection of copper cable with copper end of electrical equipment in medium voltage.

Features

Material: $\text{Cu} \geq 99.9\%$

Surface: Tin plated

Centre palm

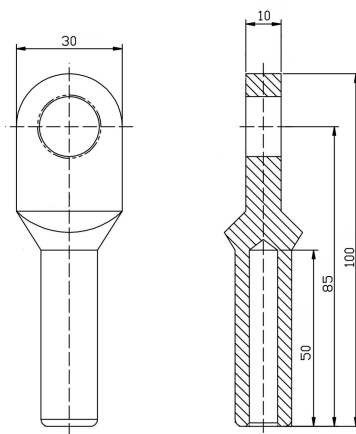

Dimensions

Part. name	Conductor Size (mm ²)	D (mm)	d (mm)	B (mm)	L(mm)
PCLC-25	25	11	7	30	85
PCLC-35	35	13	8.5	30	85
PCLC-50	50	14	9.6	30	85
PCLC-70	70	16	12	30	85
PCLC-95	95	18	13	30	85
PCLC-120	120	20	15	30	85
PCLC-150	150	22	16	30	85
PCLC-185	185	25	18	30	85
PCLC-240	240	27	20	30	85
PCLC-300	300	30	23	30	85
PCLC-400	400	34	26	30	85