

## PMC

Medium voltage, mechanical aluminium connector

### Application

For intermediate connection of copper cable, aluminium cable and aluminium alloy cable in medium voltage.

### Features

Material:

Body: high strength aluminium alloy

Bolts: brass or aluminium alloy

Surface: Tin plated


Centre with block.

Prefilled with jointing compound

Wide application range

Standard: IEC 61238-1:2003

No needs of crimping tools but only a socket spanner or a wrench.

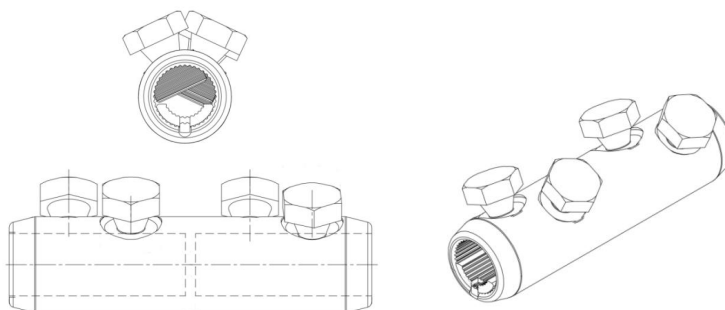

### Dimensions

Part. name	Conductor Size (mm <sup>2</sup> )	Outer Diameter (mm)	Number of Bolts	Shear-off Torque (N·m)	Wrench size
PMC25-95/2	25-95	24	2	17	13
PMC35-150/2	35-150	28	2	31	17
PMC70-240/4	70-240	33	4	36	19
PMC120-300/4	120-300	38	4	40	22
PMC185-400/6	185-400	42	6	43	22
PMC300-630/6	300-630	52	6	56	24